



Wireless

data sheet

## RSR-DLI

WIRELESS ADDRESSABLE DLI CONTROL MODULE



### WHAT IS IT ?

The RSR-DLI is a wireless receiver module with outputs to control 15 channels of addressable DLI fittings in a single Rako Room.

Individual DLI fittings can be grouped to Rako channels and the unit includes an address recovery function allowing should one DLI fitting need replacing.

Controlled from any Rako Rakom RF device, for example the RCM/RNC push button RF wall-plates.

The RSR-DLI is a wireless control module giving control of up to 15 addressable channels of DLI controllable fittings in a single Rako Room



### ADDRESSABLE DLI CONTROL

The RSR-DLI allows a wireless Rako system to have addressable control of Digital Addressable Light fittings. The module is complete with an 18V DC power supply that powers the DLI network.

Programming is achieved with Rasoft Pro and allows Auto addressing of DLI devices. Swap, Move and Group functions allow the user to achieve a logical arrangement of devices for programming.

The RSR-DLI controls up to 64 DLI devices grouped to 15 channels of control in a single Rako Room.

Note: The RSR-DLI is not supported by Rasoft Classic Software.



Wireless

## data sheet

# RSR-DLI


WIRELESS ADDRESSABLE DLI CONTROL MODULE




### technical data

dimensions	190x105x66mm
input supply	18V DC
connections	4 way screw terminal for loop in loop out
weight	340g
housing	UL V0 ABS
climate range	Temperature +2C to +40C Humidity +5% to 95% non condensing
standards	Emissions - EN61000-6-3 : 2007 Immunity - EN61000-6-1 : 2007 LVD - EN 60950-1 :2006
communication	Rakom coded fm radio, 433.9MHz
memory	Flash memory (non volatile)

### mechanical data

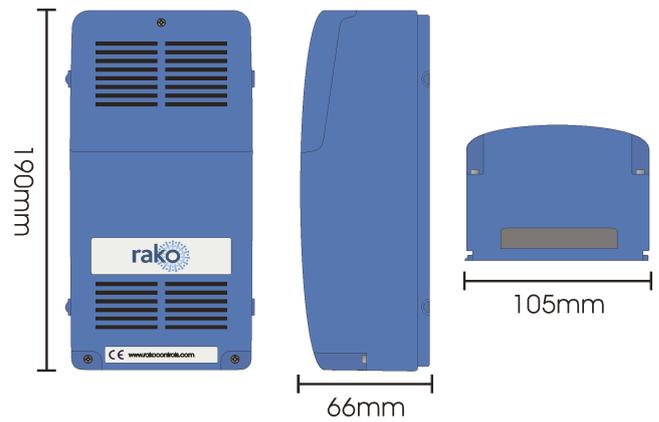

### connection details

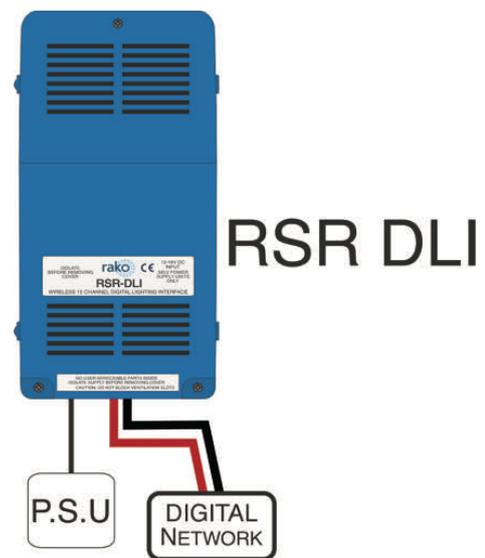

telephone +44 (0) 1634 226666 fax +44 (0) 1634 226667 [www.rakocontrols.com](http://www.rakocontrols.com)

WE RESERVE THE RIGHT TO CHANGE THE SPECIFICATION AND DATA HEREWITH WITHOUT NOTICE.

© 2019 RAKO CONTROLS LIMITED